

Product information

Drummotors

TM 160-30



Van der Graaf
Power Transmission Equipment

www.vandergraafpte.nl

The TM 160's



playground





TM 160-30

A wide range of applications

Van der Graaf has achieved a prominent position on both the domestic and international market with its "GV" Drummotors. The "GV" Drummotor has found success in a wide range of applications including the following: automotive, X-ray, construction, postal, courier, mining, aggregate, airline baggage, package flow, tyre manufacturing, fish processing, poultry processing, meat processing, agriculture, fruit and vegetable, farming, forestry, baking, dairy and many more.

4	Introduction
5	Selection table
6	Selection table Dahlander motors
7	Dimensions Drummotors mild steel
8	Dimensions Drummotors stainless steel
9	Dimensions Taildrums mild steel
10	Dimensions Taildrums stainless steel
11	Dimensions bracket / Cable exit
12	Cross sectional / parts description
16	Options
19	Product range
20	Contact us



Selection table

TYPE TM 160.30	Power kW	Beltspeed m/s at 50 Hz								Min. L mm Design A	Min. L mm Design B	Full load curr. 400 V - 50 Hz I = ... A	Weight kg L=350		
		Beltpull N													
230 230 Z 230 ZV	2,20	4,00 520	3,40 615	2,80 745	2,60 805	2,10 995	1,70 1230				400	450	4,6	32	
		1,40 1495	1,20 1740	1,15 1815	1,00 2090	0,90 2320	0,85 2460	0,80 2610							
		1,30 1610													
220 220 Z 220 ZV	1,50	4,00 355	3,40 420	2,80 510	2,60 550	2,10 680	1,70 840				350	400	3,1	31	
		1,40 1020	1,30 1095	1,20 1190	1,15 1240	1,00 1425									
		0,90 1585	0,85 1675	0,80 1780											
420 420 ZV	1,50	2,50 570	2,10 680	1,80 790	1,60 890	1,30 1095	1,10 1295				400	450	3,7	32	
		0,85 1675	0,80 1780	0,75 1900	0,70 2035	0,65 2190	0,60 2375	0,55 2590							
415 415 Z 415 ZV	1,10	2,00 525	1,70 615	1,40 745	1,25 835	1,10 950	0,85 1230				350	400	2,8	31	
		0,70 1495	0,60 1740	0,55 1900	0,50 2090	0,45 2320	0,40 2615								
		0,65 1610													
410 410 Z 410 ZV 410 PL2	0,75	2,00 355	1,70 420	1,40 510	1,25 570	1,10 650	0,85 840	0,75 950	0,70 1020		350	400	1,9	30	
		0,65 1095	0,60 1190	0,55 1295	0,50 1425										
		0,45 1585	0,40 1780	0,34 2095											
		0,27 2555	0,23 3000												
475 475 Z 475 ZV 475 PL2	0,55	2,00 260	1,70 305	1,40 375	1,25 420	1,10 475	0,85 615	0,75 695	0,70 745	0,55 950	350	400	1,6	29	
		0,65 800	0,50 1045	0,45 1160	0,40 1305	0,34 1535									
		0,31 1685													
		0,18 2810													
675 675 Z 675 ZV	0,55	0,95 550	0,60 870								350	400	1,6	31	
		0,37 1410													
		0,29 1800	0,27 1935	0,23 2270											
605 605 Z 605 ZV 605 PL2	0,37	1,40 250	1,10 320	0,95 370	0,85 415	0,70 500	0,60 585	0,50 705	0,45 780	0,35 1005	350	400	1,4	30	
		0,30 1170	0,29 1210	0,27 1300											
		0,23 1530	0,20 1760												
		0,18 1890	0,15 2270	0,12 2835											
634 634 Z	0,25	1,40 170	1,10 215	0,95 250	0,85 280	0,70 340	0,60 395	0,50 475	0,45 530	0,35 680	0,30 790	350	400	0,9	29
		0,29 820	0,27 880	0,23 1035	0,20 1190										
834 834 Z 834 PL2	0,25	1,00 240	0,65 365	0,55 430	0,40 595	0,26 915					350	400	1,0	31	
		0,17 1395	0,15 1585												
		0,14 1645	0,12 1915	0,09 2555											
825 825 Z	0,18	1,00 170	0,85 200	0,70 245	0,65 265	0,55 310	0,40 430	0,35 490	0,26 660	0,23 745	350	400	0,9	30	
		0,20 855	0,17 1005	0,15 1140											
818 818 Z	0,13	1,00 125	0,85 145	0,70 175	0,65 190	0,55 225	0,40 310	0,35 355	0,26 475	0,23 535	350	400	0,6	29	
		0,20 620	0,17 725	0,15 825											

Selection table Dahlander motors

1218		0,45 275	0,33 375								350	400			
1218 Z	0,13	0,13 950	0,11 1125	0,10 1235							350	400	0,9	31	
1218 PL2		0,09 1330	0,07 1710	0,06 1995							400	425			
1213		0,65 145	0,55 175	0,45 210	0,40 240	0,33 290	0,27 350	0,24 395	0,22 430	0,17 560	0,14 680	350	400	0,8	30
1213 Z	0,10	0,13 730	0,11 865	0,10 950											

Available standard facewidth's: 350 - 400 - 425 - 450 - 500 - 550 - 600 - 650 - 700 - 750 - 800 - 850 - 900 - 950 - 1000 mm

When an electro-mechanical brake is fitted, the minimum facewidth is increased by 100 mm

The total weight of a Drummotor grows approx. 2,5 kg per 100 mm; Available torque: (Beltpull N x drum diameter m) / 2 Nm

Dahlander motors

TYPE TM 160.30	Power kW	Beltspeed m/s at 50 Hz								Min. L mm Design A	Min. L mm Design B	Full load curr. 400 V - 50 Hz I = ... A	Weight kg L=350
		Beltpull N											
410/220		2,00/4,00 355	1,70/3,40 420	1,40/2,80 510	1,30/2,60 550	1,05/2,10 680	0,85/1,70 840	0,75/1,50 950	0,70/1,40 1020				
410/220 Z	0,75/1,50	0,65/1,30 1095	0,60/1,20 1190	0,55/1,10 1295	0,50/1,00 1425					400	450	2,3/3,3	32
410/220 ZV		0,45/0,90 1585	0,42/0,84 1695	0,40/0,80 1780	0,35/0,70 2035								
475/215		2,00/4,00 260	1,70/3,40 305	1,40/2,80 375	1,25/2,50 420	1,05/2,10 500	0,85/1,70 615	0,75/1,50 695	0,70/1,40 745				
475/215 Z	0,55/1,10	0,65/1,30 805	0,60/1,20 870	0,55/1,10 950	0,50/1,00 1045	0,45/0,90 1160	0,42/0,84 1245	0,40/0,80 1305	0,35/0,70 1495	350	400	1,6/2,5	31
475/215 ZV		0,31/0,62 1685											
405/210		2,00/4,00 180	1,70/3,40 210	1,40/2,80 255	1,25/2,50 285	1,05/2,10 340	0,85/1,70 420	0,75/1,50 475	0,70/1,40 510				
405/210 Z	0,37/0,75	0,65/1,30 550	0,60/1,20 595	0,55/1,10 650	0,50/1,00 715	0,45/0,90 790	0,42/0,84 850	0,40/0,80 890	0,35/0,70 1020	350	400	1,0/1,8	29
405/210 ZV		0,31/0,62 1150											
837/475		1,00/2,00 260	0,85/1,70 305	0,70/1,40 375	0,65/1,30 400	0,55/1,10 475	0,45/0,90 580	0,40/0,80 655	0,35/0,70 745	350	400		
837/475 Z	0,27/0,55	0,26/0,52 1005	0,23/0,46 1135							350	400	1,5/1,3	31
837/475 ZV		0,20/0,40 1305	0,17/0,34 1535	0,15/0,30 1740						350	400		
837/475 PL2		0,13/0,26 1945	0,11/0,22 2300	0,09/0,18 2810						400	425		
825/405		1,00/2,00 175	0,85/1,70 205	0,70/1,40 250	0,65/1,30 270	0,55/1,10 320	0,45/0,90 390	0,40/0,80 440	0,35/0,70 500	350	400		
825/405 Z	0,18/0,37	0,26/0,52 675	0,23/0,46 765	0,20/0,40 880	0,17/0,34 1035	0,15/0,30 1170				350	400	1,2/1,0	30
825/405 PL2		0,13/0,26 1310	0,11/0,22 1545	0,09/0,18 1890						400	425		

Available standard facewidth's: 350 - 400 - 425 - 450 - 500 - 550 - 600 - 650 - 700 - 750 - 800 - 850 - 900 - 950 - 1000 mm

When an electro-mechanical brake is fitted, the minimum facewidth is increased by 100 mm


The total weight of a Drummotor grows approx. 2,5 kg per 100 mm; Available torque: (Beltpull N x drum diameter m) / 2 Nm



Dimensions Drummotors mild steel


TM 160A30

TM 160A30, mild steel Drummotor with cast iron junctionbox

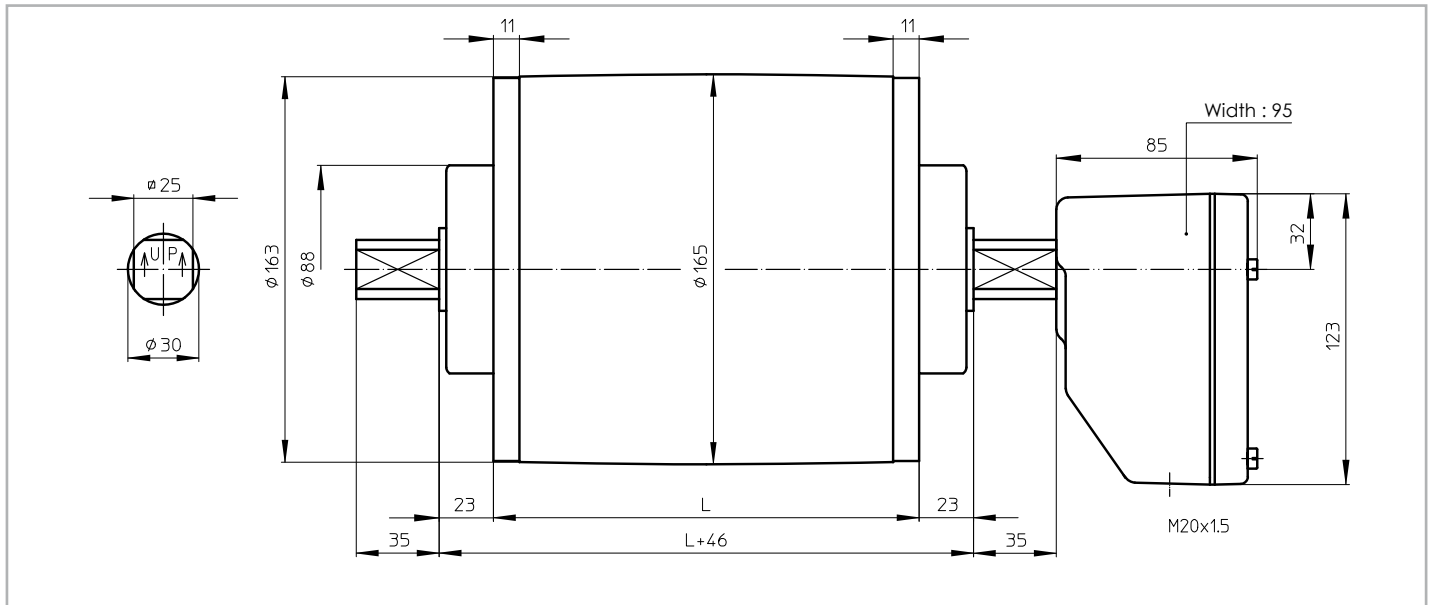

TM 160B30


TM 160B30, mild steel Drummotor with cast iron junctionbox

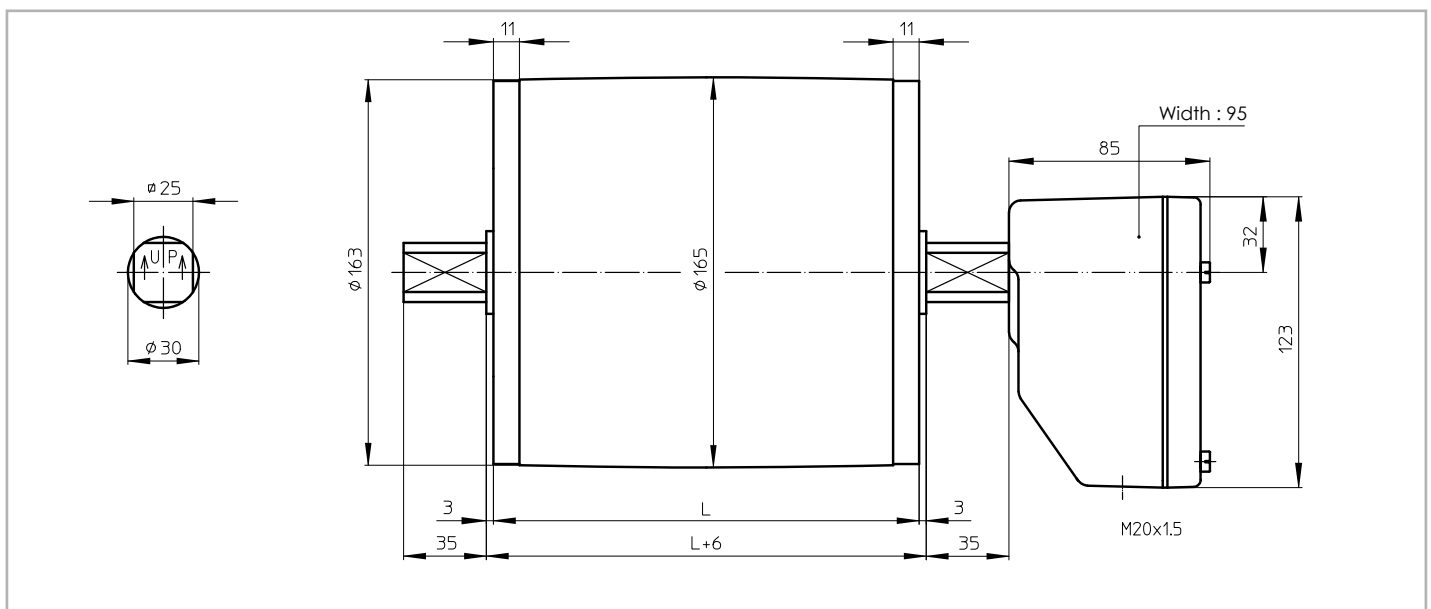

Dimensions Drummotors stainless steel


TM 160A30 CR

TM 160A30 CR, stainless steel Drummotor with polyamide junctionbox and CR sealing

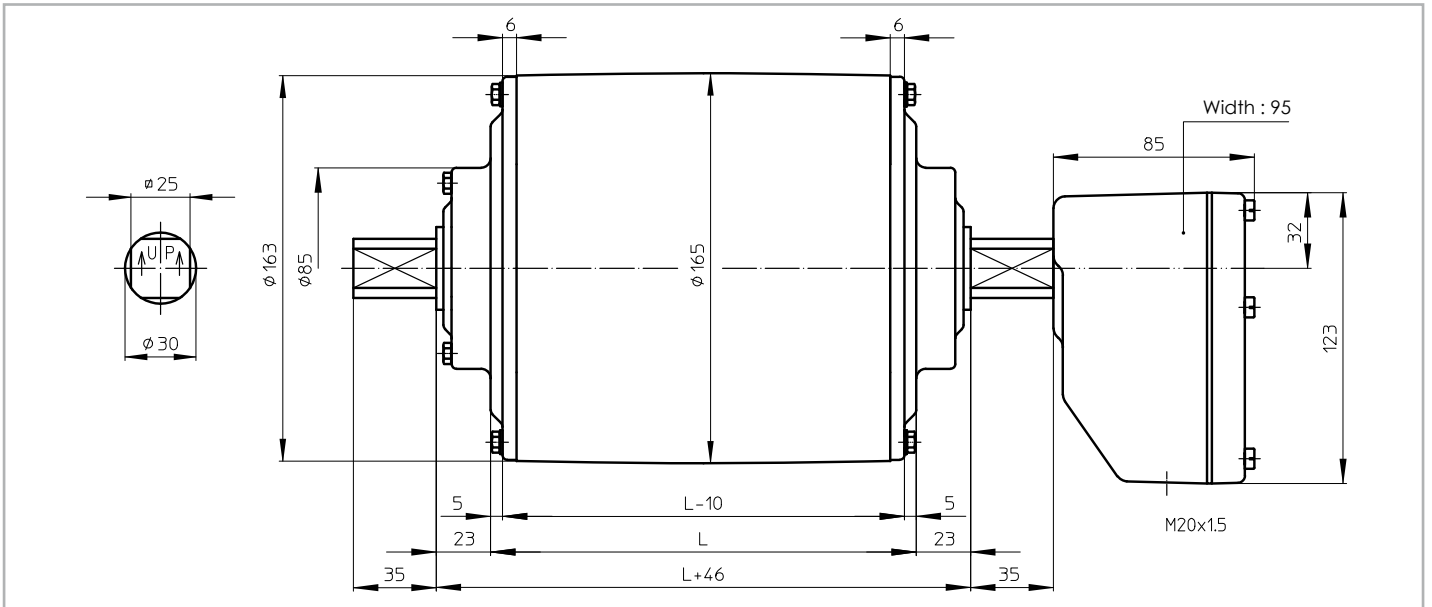

TM 160B30 CR

TM 160B30 CR, stainless steel Drummotor with polyamide junctionbox and CR sealing

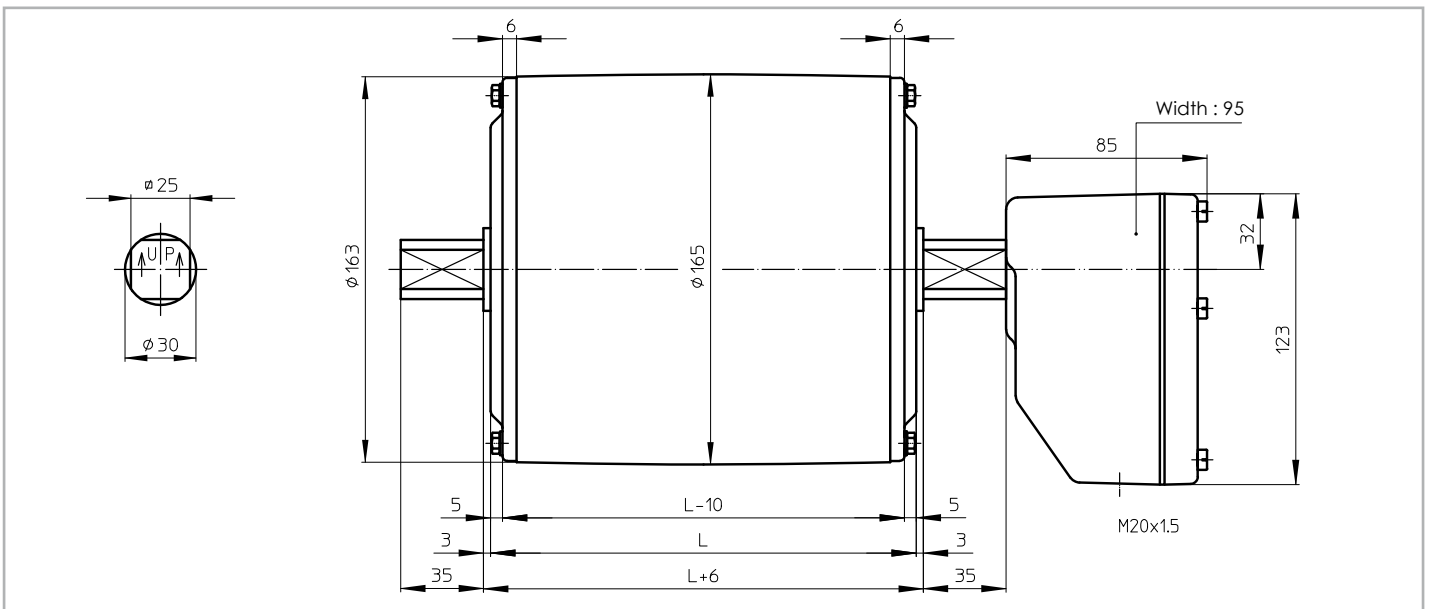




Dimensions Taildrums mild steel


KT 160A30

KT 160A30, mild steel Taildrum

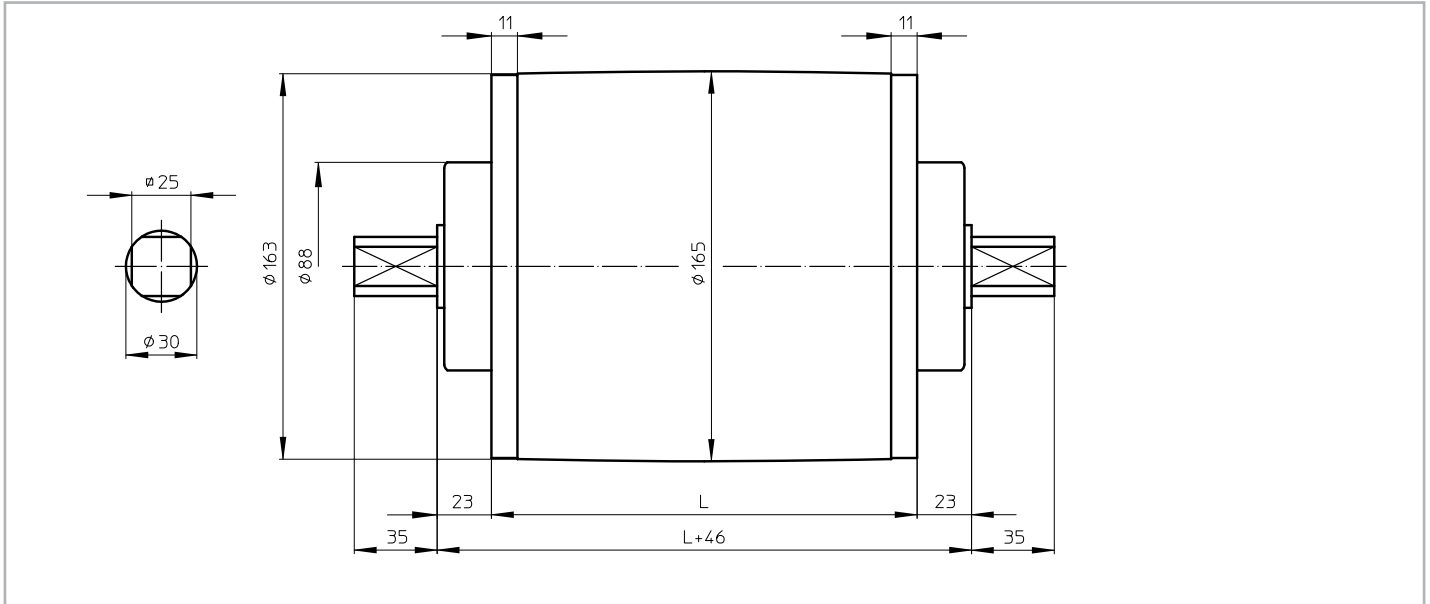

KT 160B30


KT 160B30, mild steel Taildrum

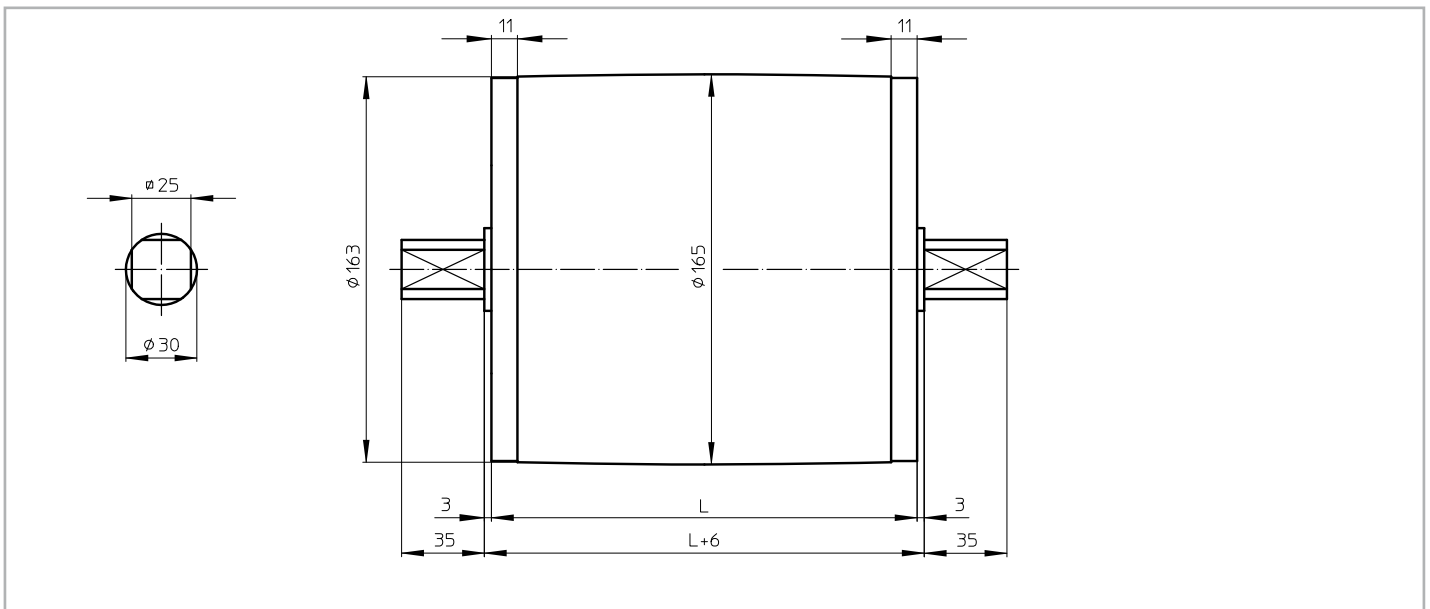

Dimensions Taildrums stainless steel


KT 160A30 CR

KT 160A30 CR, stainless steel Taildrum with CR sealing

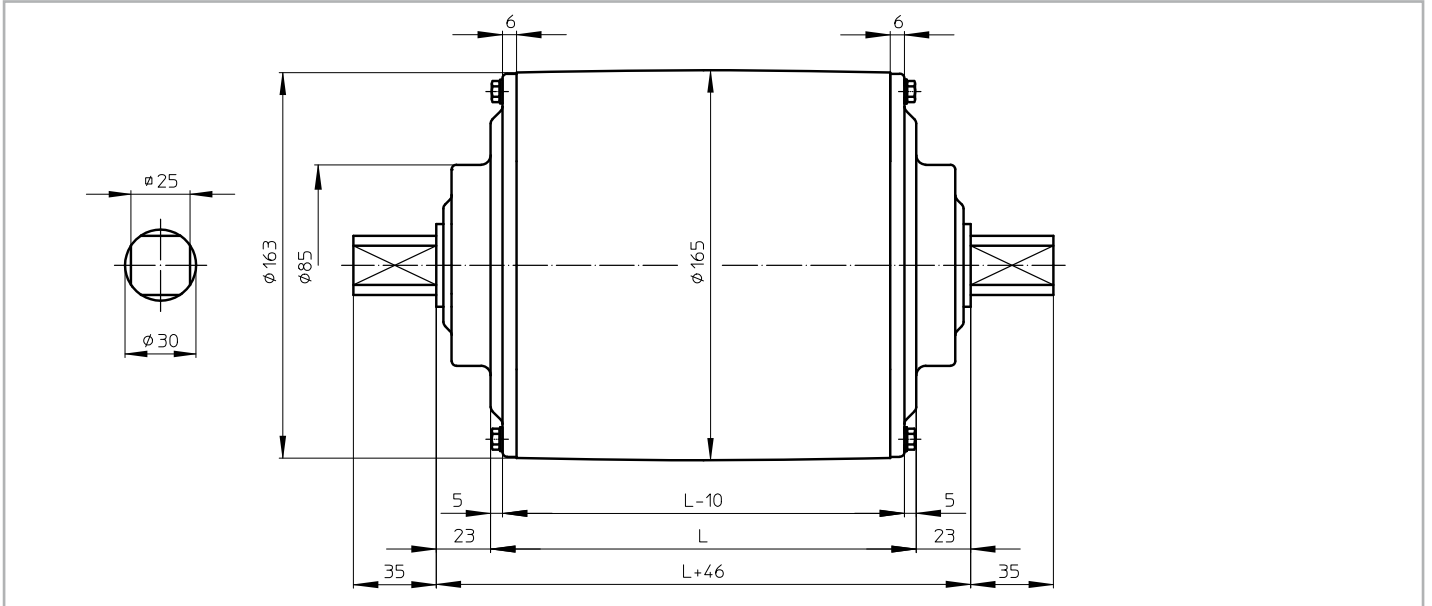

KT 160B30 CR

KT 160B30 CR, stainless steel Taildrum with CR sealing

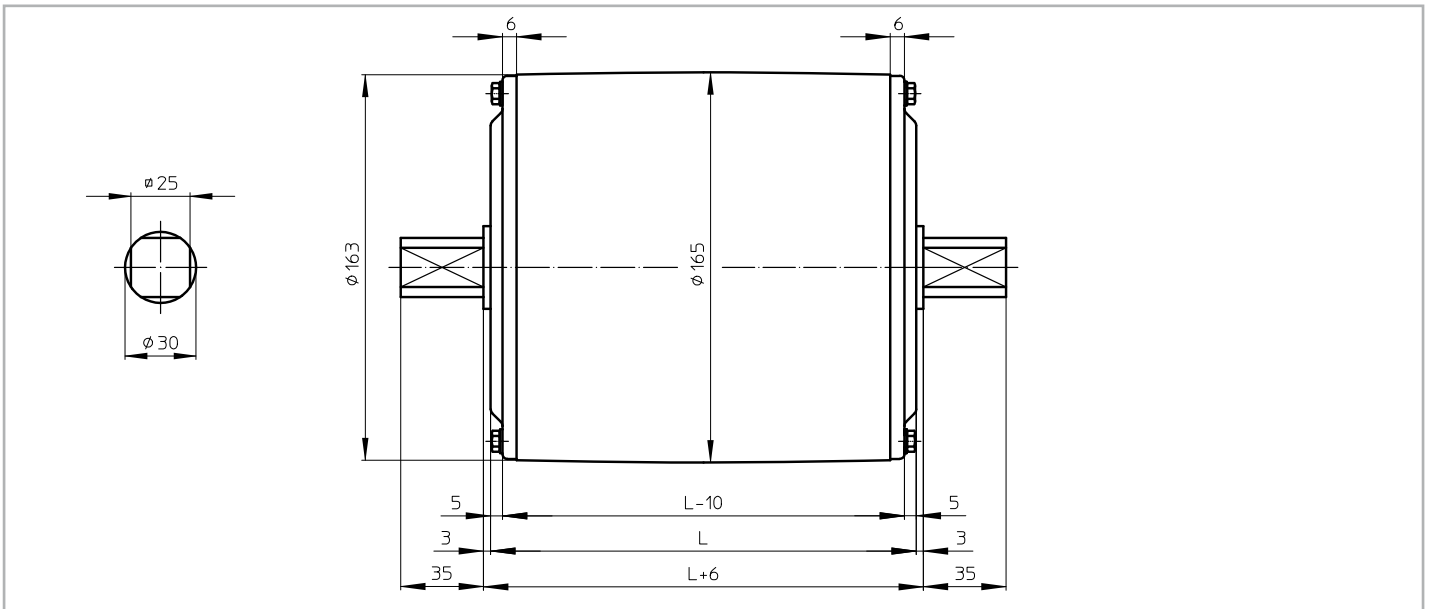




Dimensions bracket / Cable exit

AB 30

AB 30, cast iron or stainless steel bracket
Weight: 2,4 kg per pair

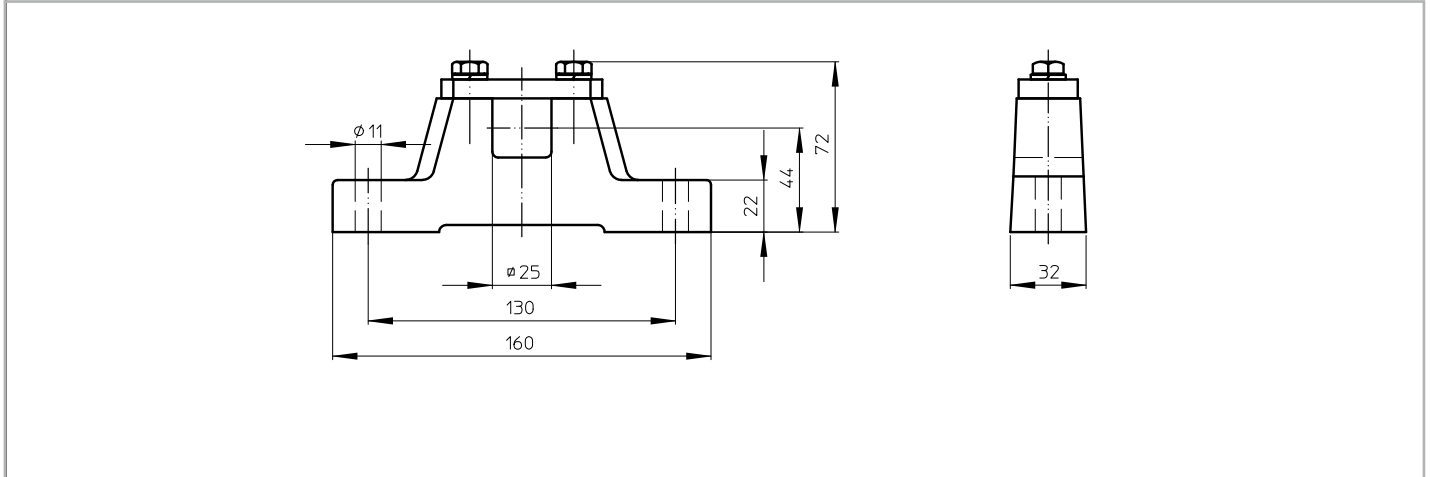


Standard design of a TM 160-30 is with a cast iron terminal box. For stainless steel design, this can be either a polyamide or stainless steel junctionbox.

On request a Drummotor can be fitted with a cable. In this case it is important to know the available voltage (preferably 1 voltage), the length of the cable, whether the cable is shielded or not and the type of cable exit. An overview of available cable exits is shown below.


Option 1

Straight cable exit with cable gland

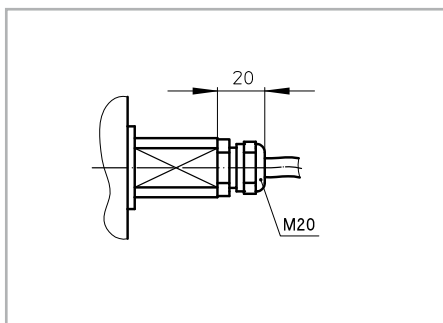


Option 3

Elbow cable exit with cable gland
(minimum facewidth increases with 25 mm)

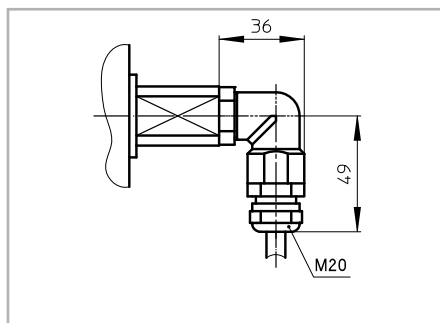

Option 4


Open cable exit (minimum facewidth increases with 25 mm)

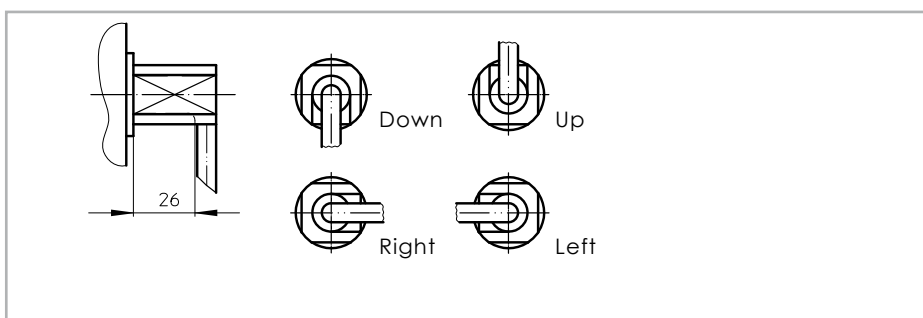

Cross sectional / parts description

TM 160A30

Legenda

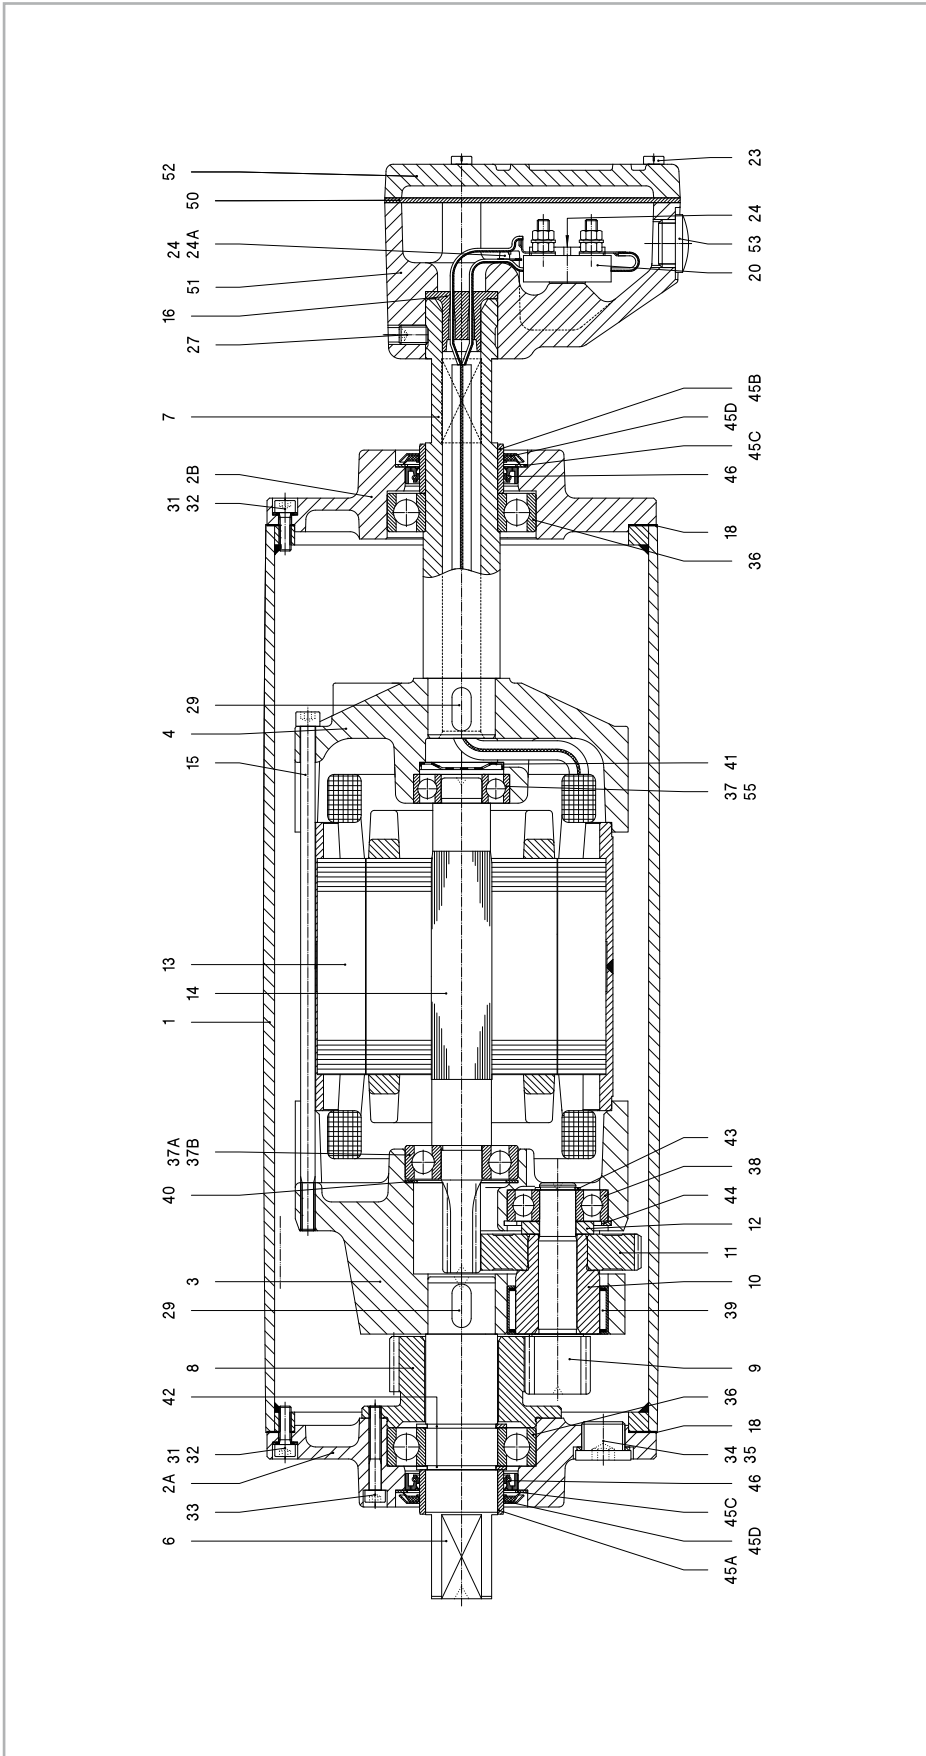


Remark: Drummotor also available in B-design (TM160B30)

1	Shell	27	Setscrew	38	Ballbearing	45D	Gammaring
2A	Endflange	29	Key	39	Needlebearing	46	Oilseal
2B	Endflange	31	Int. hex screw	40	Shim	50	Seal
3	Gearhousing	32	Washer	41	Disc	51	Junctionbox
4	Motoflange	33	Int. hex screw	42	Circlip	52	Junctionbox cover
6	Shaftend	34	Fillerplug	43	Circlip	53	Stopping plug
7	Hollow shaft	35	Washer	44	Circlip	55	Ballbearing incl. backstop
8	External gear	36	Ballbearing	45A	Bearing race	57	Dataplate
9/10	Pinion with bush	37	Ballbearing	45B	Bearing race		
11	Gear	37A/B	Ballbearing	45C	Shim plated		
		12	Distance ring				
		13	Stator				
		14	Rotor				
		15	Int. hex screw				
		16	Cable passage				
		18	Gasket				
		20	Terminalboard				
		23	Cyl. head screw				
		24	Cyl. head screw				
		24A	Toothed lock washer				
		29	Distance ring				
		31	Int. hex screw				
		32	Washer				
		33	Int. hex screw				
		34	Fillerplug				
		35	Washer				
		36	Ballbearing				
		37	Ballbearing				
		37A/B	Ballbearing				
		40	37A				
		40	37B				
		41	37				
		42	8				
		43	4				
		44	15				
		45A	45A				
		45B	45B				
		45C	45C				
		45D	45D				
		46	46				
		50	50				
		51	51				
		52	52				
		53	53				
		55	55				




TM 160A30 Z

Legenda

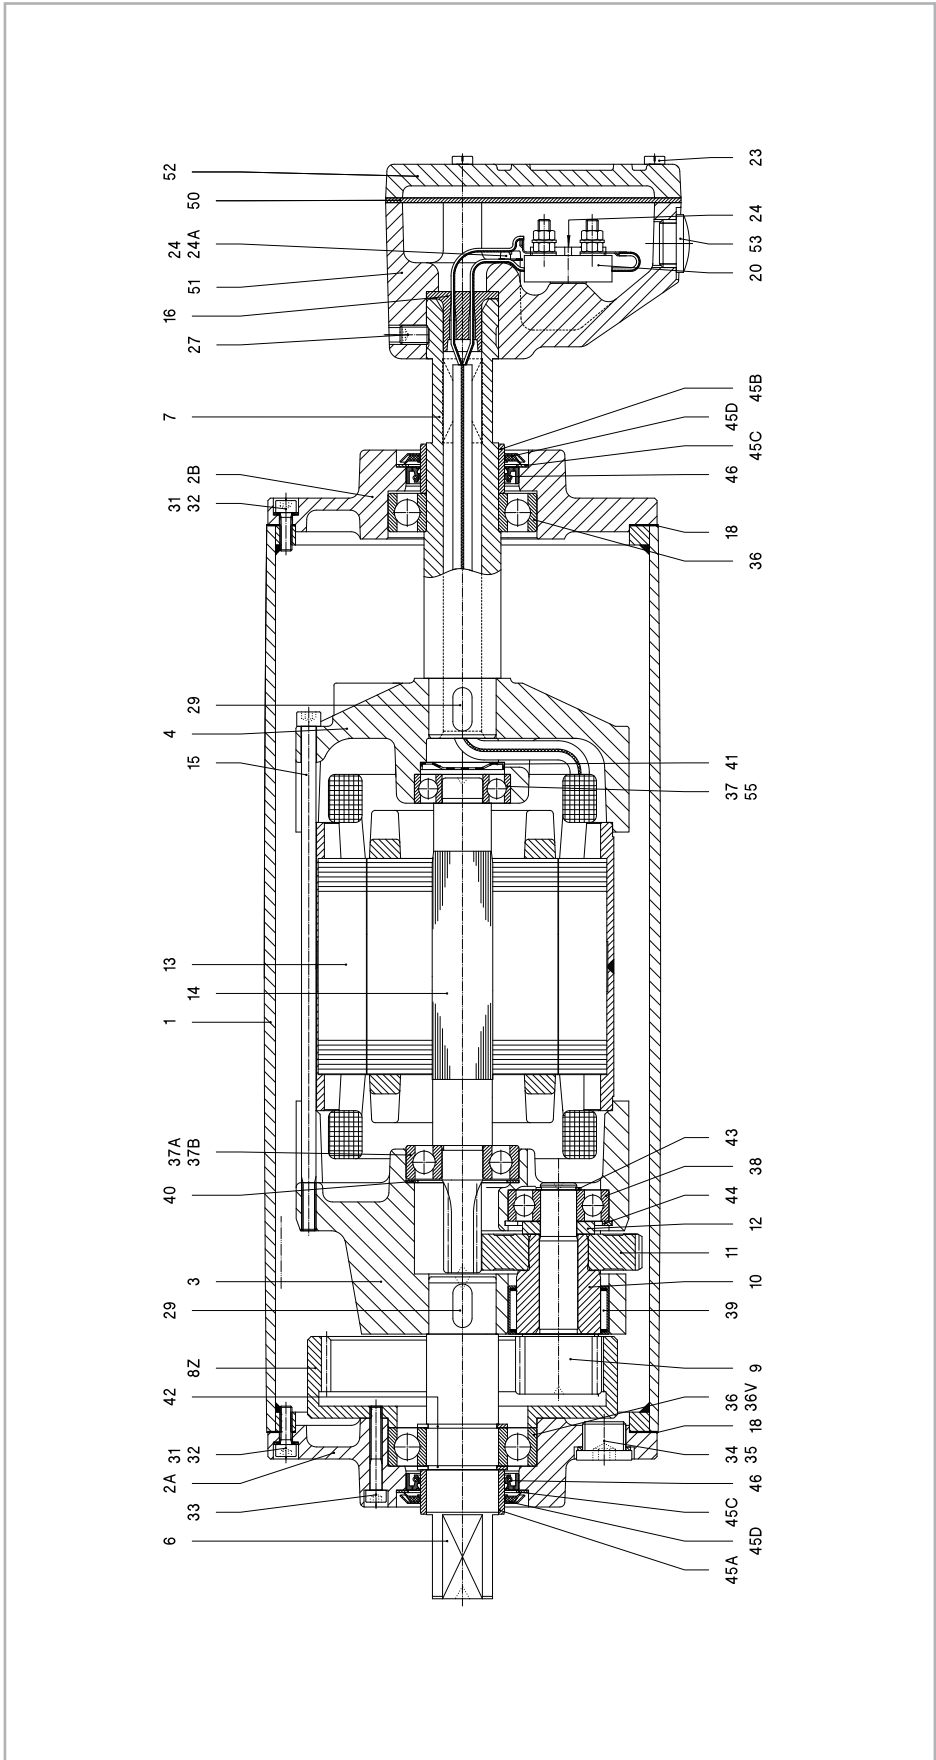

Remark: Drummotor also available in B-design (TM160B30 Z)

1	Shell	27	Setscrew	37A/B	Ballbearing	45C	Shim plated
2A	Endflange	29	Key	38	Ballbearing	45D	Gammaring
2B	Endflange	31	Int. hex screw	39	Needlebearing	46	Oilseal
3	Gearhousing	32	Washer	40	Shim	50	Seal
4	Motoflange	33	Int. hex screw	41	Disc	51	Junctionbox
6	Shaftend	34	Fillerplug	42	Circlip	52	Junctionbox cover
7	Hollow shaft	35	Washer	43	Circlip	53	Stopping plug
8Z	Internal gear	36	Ballbearing	44	Circlip	55	Ballbearing incl.
9/10	Pinion with bush	36V	Cyl. roller bearing	45A	Bearing race		backstop
11	Gear	37	Ballbearing	45B	Bearing race	57	Dataplate
12	Distance ring						
13	Stator						
14	Rotor						
15	Int. hex screw						
16	Cable passage						
18	Gasket						
20	Terminalboard						
23	Cyl. head screw						
24	Cyl. head screw						
24A	Toothing lock washer						
29							
30							
31							
32							
33							
34							
35							
36							
36V							
37							
37A/B							
37B							
38							
39							
40							
41							
42							
43							
44							
45A							
45B							
45C							
45D							
46							
47							
48							
49							
50							
51							
52							
53							
54							
55							
56							
57							

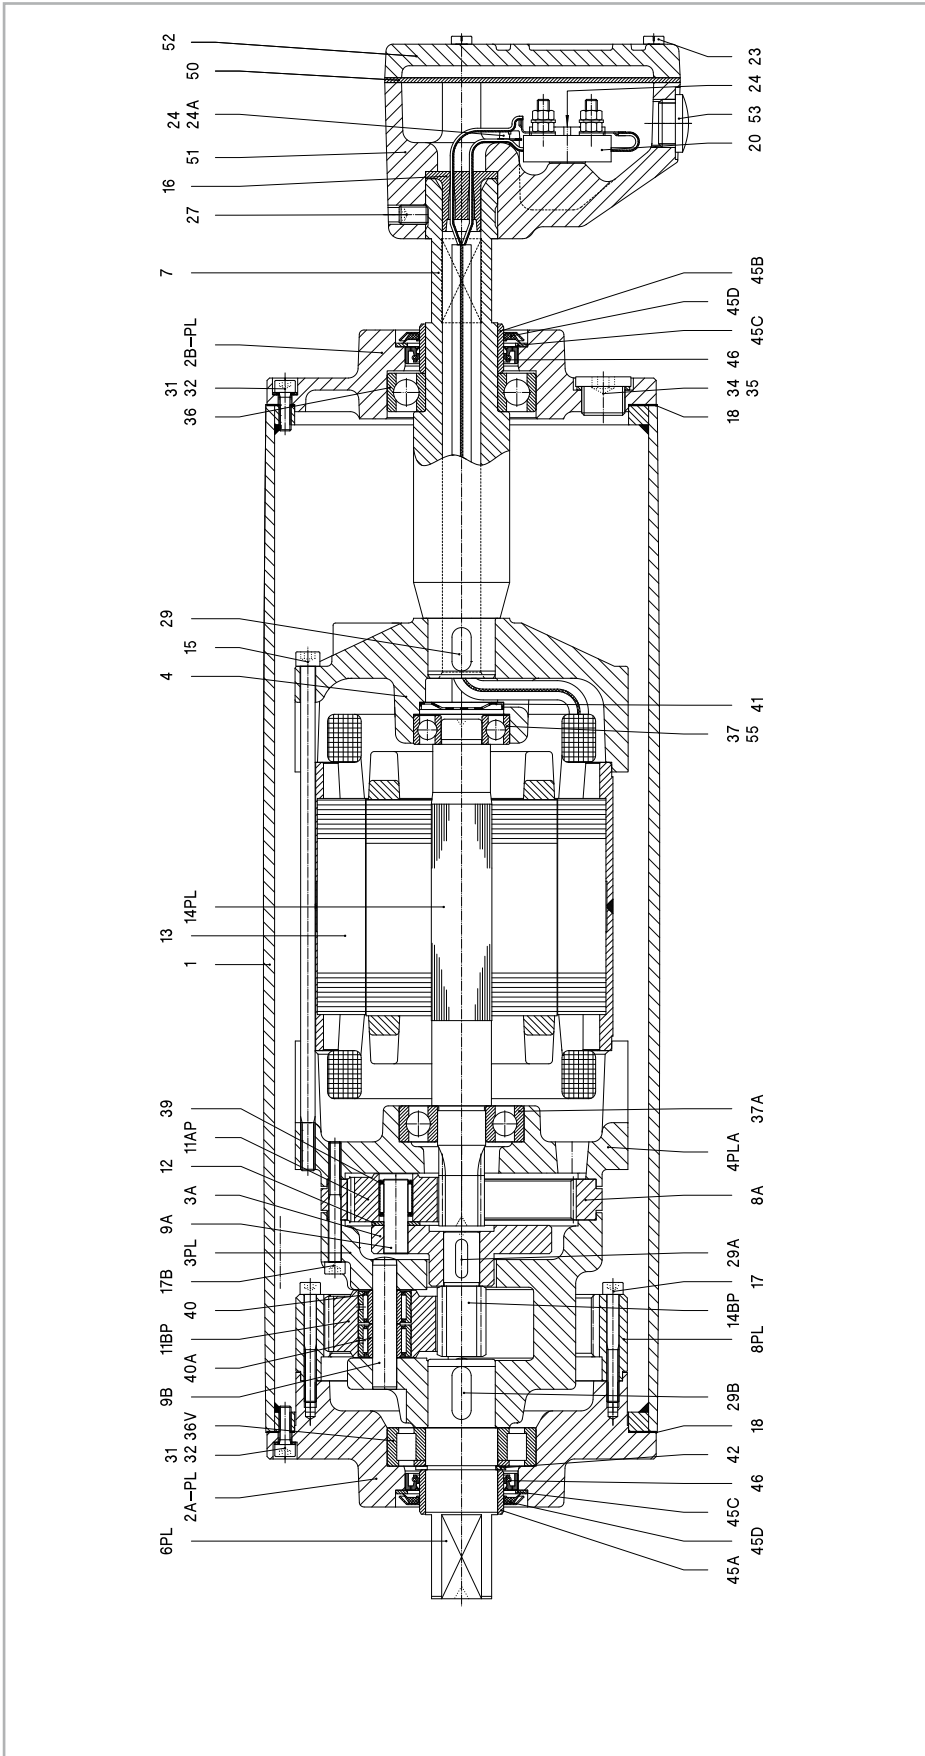


Remark: Drummotor also available in B-design (TM160B30 PL2)

1	Shell	9B	Cylindrical pin	20	Terminalboard	36	Ballbearing	45D	Gammaring
2A-PL	Endflange	11AP	Planetary gear	23	Cyl. head screw	36V	Cyl. roller bearing	46	Oilseal
2B-PL	Endflange	11BP	Planetary gear	24	Cyl. head screw	37	Ballbearing	50	Seal
3A	Planetary carrier	12	Shim	24A	Toothed lock washer	37A	Ballbearing	51	Junctionbox
3PL	Planetary housing	13	Stator	27	Setscrew	39	Needlebearing	52	Junctionbox cover
4	Motorflange	14PL	Rotor	29	Key	40	Needlebearing	53	Stopping plug
4PLA	Motorflange	14BP	Sunwheel	29A	Key	40A	Innerring	55	Ballbearing incl. backstop
6PL	Shaftend	15	Int. hex screw	29B	Key	41	Disc	57	Dataplate
7	Hollow shaft	16	Cable passage	31	Int. hex screw	42	Circlip		
8A	Internal gear	17	Int. hex screw	32	Washer	45A	Bearing race		
8PL	Internal gear	17B	Int. hex screw	34	Fillerplug	45B	Bearing race		
9A	Cylindrical pin	18	Gasket	35	Washer	45C	Shim plated		

KT 160A30

Legenda

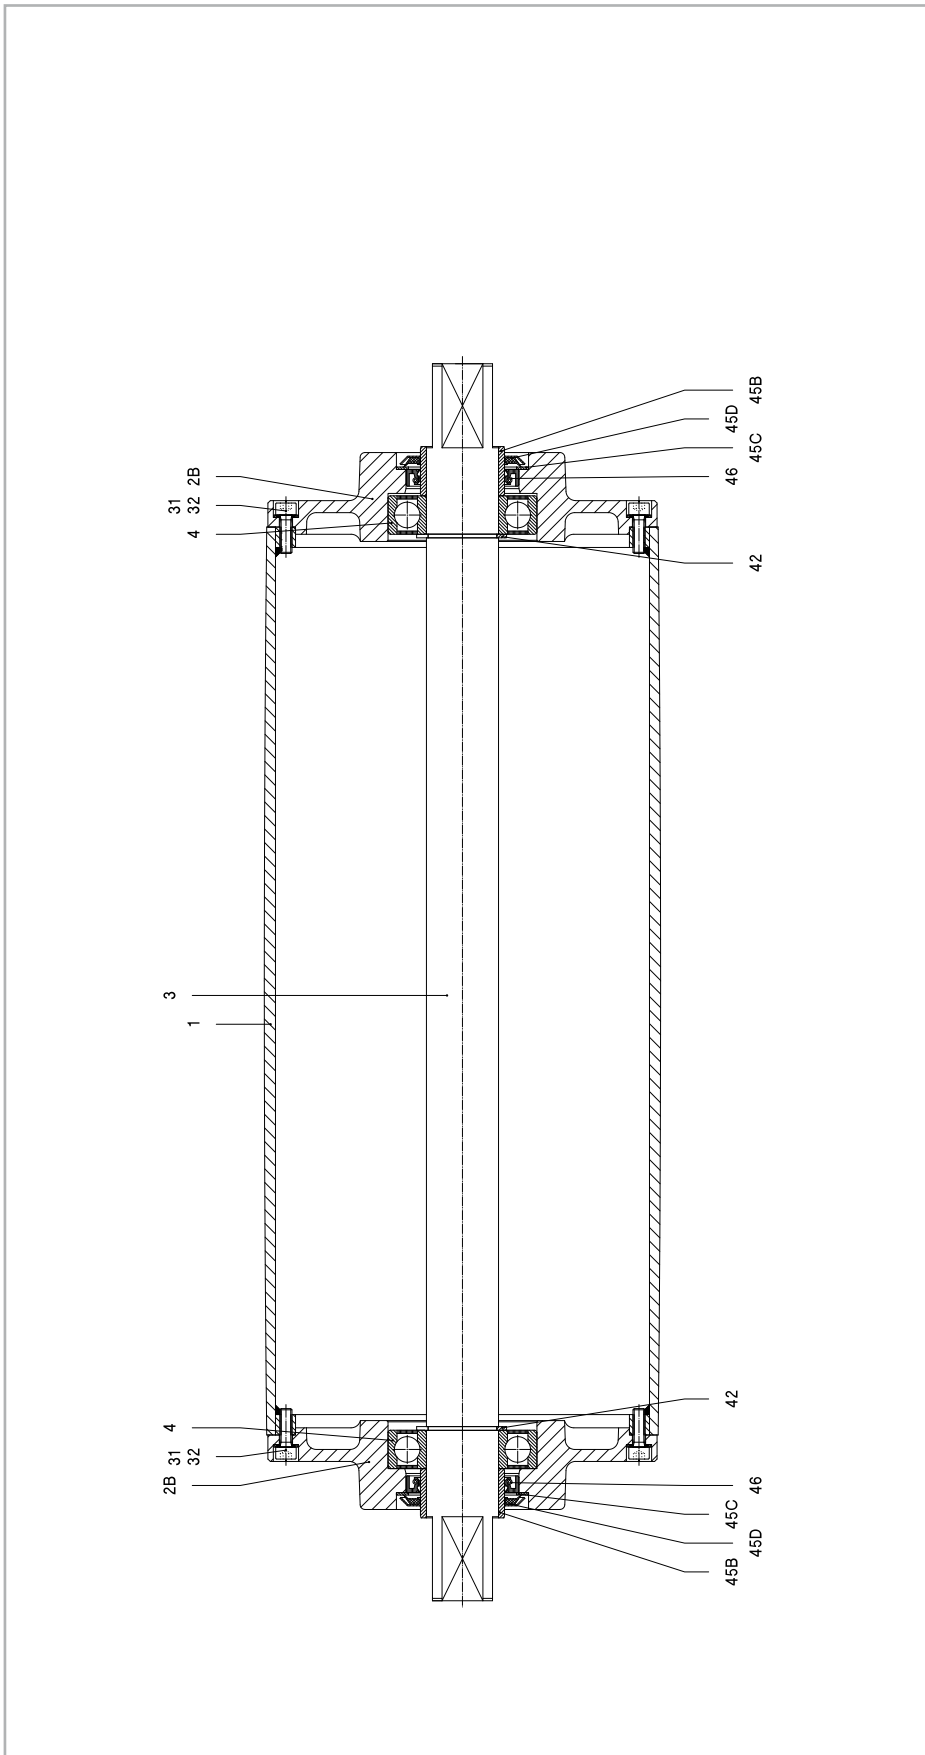

Remark: Taildrum also available in B-design (KT1 60B30)

1	Shell	42	Circlip
2B	Endflange	45B	Bearing race
3	Shaft	45C	Shim plated
4	Ballbearing	45D	Gammaring
31	Int. hex screw	46	Oliseal
32	Washer		

Material

The external parts of the Drummotor are made from mild steel and cast iron. Depending on the application it is also possible to manufacture in stainless steel (complete or part). You can choose between stainless steel 304 (general food industry) and stainless steel 316 (salt water applications).

Backstop - Brake

If an inclined belt conveyor is stopped fully loaded, it could run backwards.

To prevent this we can install a backstop. One of the bearings in the Drummotor is replaced by a one way bearing. The way this bearing is installed determines the direction of rotation of the drum. TBRH indicates a cw rotation and TBLH ccw.

In situations where a Drummotor needs to be able to drive in both directions it is not possible to use a backstop. In this case we use a brake. When an declined belt or a horizontal belt needs to be stopped quickly to pick or place items a brake is the best solution.

Inclined position

Sometimes a Drummotor needs to be installed on an inclined or even vertical position. This is possible, but we need to make adjustments to the oil level in the drum as the oil will flow to the lower side of the Drummotor causing the top bearing to run without lubrication. To prevent problems we will need to know the installation angle so we can fill the drum with extra oil and fit a double sealed bearing on the upper side.

Thermal protection

A Van der Graaf Drummotor can be fitted with thermal protection. This consists of either a thermistor (PTC) or bi-metal (klixon). We install these on each phase of the electric motor.

Encoder - Sensor bearing

In certain applications it is required to measure the speed or position of a conveyor belt. For this type of application we can install an encoder or sensor bearing to accurately measure rotational speed of the Drummotor.

The accuracy needed will determine the type of encoder or sensor used.

Lagging

The power produced by the Drummotor has to be transferred to the belt and lagging is used to give more friction between the Drummotor and the conveyor belt. Van der Graaf can fit your Drummotor with different kinds of lagging.

There is a difference between cold and hot vulcanised lagging. Cold vulcanised means the lagging is glued to the Drummotor usually in sheet form and the join 'welded' together. Hot vulcanising is a process where the shell is wrapped around with thin layers of rubber. The shell with the rubber is then baked in an autoclave fusing the layers together creating a seamless finish.

It is possible to cut grooves (e.g chevron or diamond) in the lagging.

Sprockets

Do you wish to use a Drummotor to drive modular belts? Van der Graaf can help you! Fitting sprockets suitable for various types of modular belts is a simple solution. The Drummotor is manufactured with a cylindrical shell and machined with a patented 'keying' system. The sprockets are simply 'slid' on and locked securely into position.

Sealings for mild steel Drummotors

RB sealing - IP 66



This is Van der Graaf's standard sealing. This type of sealing will work in most conditions.

RBS sealing - IP 66



This sealing is specifically designed for those applications where high water pressure is used for cleaning.

HD sealing - IP 66



This sealing is designed for abrasive applications, like sand, gravel and soil.

Sealings for stainless steel Drummotors

CR sealing - IP 66



This is our standard sealing for stainless steel Drummotors, a very effective, multi labyrinth sealing.

UW sealing - IP 68



This sealing is suitable for under water applications. The maximum depth is approx 2,5 m.

Options

Specification	Standard	Optional
Construction		
Shafts and bolts	Mild steel	Stainless steel
Endflanges	Cast iron	Stainless steel
Shell	Mild steel	Stainless steel
Junctionbox	Cast iron	Stainless steel or polyamide
Cable		Shielded or non-shielded
Sealing mild steel	RB	RBS, HD
Sealing stainless steel	CR	UW
Shell		
Crowned	•	
Cylindrical		•
Balanced		•
Lagging, cold vulcanised		•
Lagging, hot vulcanised		•
Lagging, FDA approved		•
Fitted with grooves, patterns		•
Sprockets		•
Electro motor		
Three-phase asynchronous	•	
Power supply	230/400 V - 50 Hz	Other voltages and frequencies on request
Two speed (Dahlander)		•
Twin drive (double power)		•
Insulation class	F	H
Thermal protection		Bi-metal or thermistor
Run by frequency inverter	•	
Other options		
Food grade oil		•
Backstop, mechanical		•
Brake, electro mechanical		•
Clutch brake, electro mechanical		•
Inclined or vertical position		•
Other facewidth's		•
Different shaft designs		•
Encoder or sensor bearing in drum motor		•
Encoder or sensor bearing in tail drum		•
Certificates		
CE	•	
UL		•
CSA		•
ATEX zone 22, dust		•
UW Under water application (IP68)		•




Product range

Our products, an overview

Drum motor type	TM 100B25	TM 113B25	TM 127.25	TM 138.25	TM 160.25	TM 160.30	TM 215.30	TM 215.40
Drum diameter (mm)	100	113	127	138	160	160	215	215
Shaft diameter (mm)	25	25	25	25	25	30	30	40
Power (kW)	0.05-0.37	0.04-0.55	0.10-1.1	0.10-1.1	0.10-0.75	0.10-2.2	0.10-2.2	0.37-5.5
Speed (m/s)	0.007-3.60	0.008-4.40	0.008-2.60	0.009-2.80	0.13-3.30	0.06-4.00	0.08-5.30	0.12-4.70

Drum motor type	TM 215B50	TM 273.40	TM 315.40	TM 315.50	TM 400A50	TM 400.60	TM 500A60	TM 500A75
Drum diameter (mm)	215	273	315	315	400	400	500	500
Shaft diameter (mm)	50	40	40	50	50	60	60	75
Power (kW)	1.5-4.0	0.37-5.5	0.37-5.5	1.1-11	1.1-11	1.5-22	1.5-22	11-30
Speed (m/s)	0.18-0.31	0.17-5.00	0.18-5.20	0.16-4.40	0.20-4.80	0.20-4.60	0.25-4.70	0.80-3.20

Drum motor type	TM 620A75	TM 630A100	TM 800A100	TM 800A130				
Drum diameter (mm)	620	630	800	800				
Shaft diameter (mm)	75	100	100	130				
Power (kW)	11-30	22-55	22-55	55-132				
Speed (m/s)	1.00-3.90	1.00-4.00	1.25-5.10	1.60-4.50				

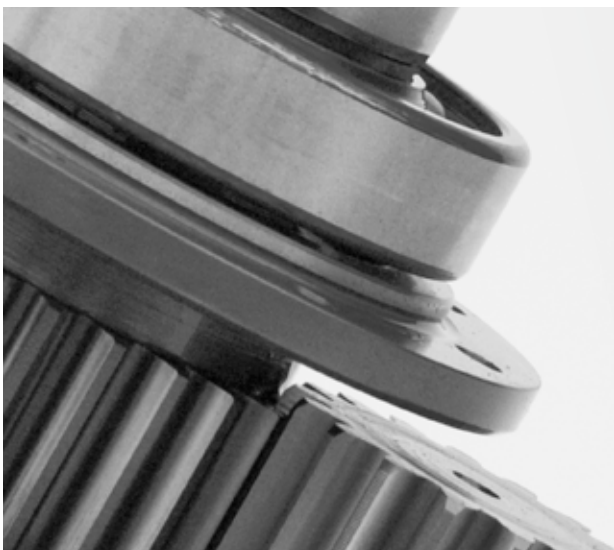

Design benefits

- Robust, industrial design
- Fully enclosed
- Oil filled
- Well-sized gears and bearings

Installation advantages

- Easy to install
- Compact and reliable
- Easy to clean
- Virtually maintenance free
- Low Life Cycle Costs





Van der Graaf

Power Transmission Equipment

Contact us

Netherlands

Van der Graaf B.V.
De Weijert 14
P.O. Box 3
8325 ZG Vollenhove
Tel: 00 31 527 241441
Fax: 00 31 527 241488
E-mail: info@vandergraafpte.nl
www.vandergraafpte.nl



Canada

Van der Graaf Inc.
2 Van der Graaf Court
Brampton
Ontario L6T 5R6
Tel: 00 1 905 793 8100
Fax: 00 1 905 793 812
E-mail: info@vandergraaf.com
www.vandergraaf.com



Great Britain

Van der Graaf U.K. Ltd.
Unit 23, The Metro Centre
Welbeck Way Woodston
Peterborough PE2 7UH
Tel: 00 44 1733 391777
Fax: 00 44 1733 391044
E-mail: sales@vandergraaf.co.uk
www.drummy.com



USA

Van der Graaf Corp.
51515 Celeste
Shelby Township
48315 Michigan
Tel: 00 1 866 595 3292
Fax: 00 1 888 326 0089



Germany

Van der Graaf GmbH
Rheiner Straße 24 B
48432 Rheine-Mesum
Tel: 00 49 5975 306210
Fax: 00 49 5975 3062120
E-mail: info@vandergraaf.de
www.vandergraaf.de



Sweden

Van der Graaf Scandinavia AB
Spinngatan 2
267 73 Billesholm
Tel: 00 46 42 22 0802
Fax: 00 46 42 22 0803
E-mail: info@vandergraaf.se
www.vandergraaf.se



Finland

Van der Graaf Scandinavia AB
Tel: 00 358 400 419063
E-mail: info@vandergraaf.fi
www.vandergraaf.fi